PA6-OM - SimilPOM - HT filament

FDM Technology, 210706

Introduction

High Temperature Polyamide

Weight: 750 gr
Diameter: 1,75 mm - 2,85 mm
Color: White

Main Features

- Strong and tough parts
- Simil-Pom
- High temperature resistance up to 160°C
- High dimensional stability
- Easy to process
- Low water uptake (4x slower than other PA6-based filaments)
- Compatible with water support materials and HIPS

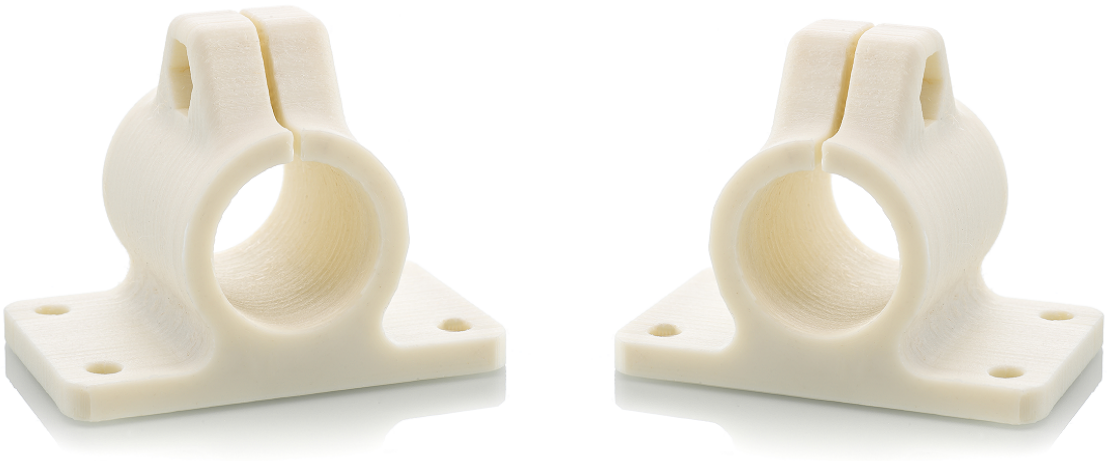

Technical Data Sheet

Recommended 3D-Print processing parameters	
Nozzle Temperature	265 – 290 °C
Build Chamber Temperature	-
Bed Temperature	60 – 80 °C
Bed Material	PEI or Glass
Nozzle Diameter	⩾ 0.4 mm,
Print Speed	30 - 80 mm/s

Mechanical Properties (Dry)		
Tensile strength	70 MPa	ISO 527
Elongation at Break	2.7%	ISO 527
Young's Modulus	3050 MPa	ISO 527

Thermal Properties		
HDT @ 1.8 MPa	81 °C	ISO 75
HDT @ 0.45 MPa	145 °C / 293 °F	ISO 75-2
Glass Transition Temperature	70 °C / 158 °F	ISO 11357-2
Melting Temperature	234 °C / 453 °F	ISO 11357-3

Notes

The data contained in this publication are based on our current knowledge and experience. In view of the many factors that may affect processing and application of our product, these data do not relieve processors from carrying out their own investigations and tests; neither do these data imply any guarantee of certain properties, nor the suitability of the product for a specific purpose. Any descriptions, drawings, photographs, data, proportions, weights etc. given herein may change without prior information and do not constitute the agreed contractual quality of the product. It is the responsibility of the recipient of our products to ensure that any proprietary rights and existing laws and legislation are observed.